

MIYOTA

Cal. 91**

9100, 9110, 9120, 9130, 9132



AUTOMATIC & MANUAL WINDING MOVEMENT WITH MULTIFUNCTION

Basic specification

Ligne	13-1/2"
Overall diameter	Φ30.2mm
Case fitting diameter	Φ25.6mm
Total height	5.52mm
Vibration frequency	28800 vibrations per hour
Jewels	26 Jewels

Function

Automatic & manual winding
Display by means of hands: hour, minute, second.
Date calendar
Day / Month / 24Hours display by means of hands
Power reserve display
Stop second device
Shock-absorber device for balance staff

Technical characteristics

Balanceable weight of hands

Second hand	Max. 0.60μN·m
Minute hand	Max. 1.25μN·m
Hour hand	Max. 1.50μN·m
Small hand	Max. 0.04μN·m
Power reserve hand	Max. 0.25μN·m

Hands fitting force

Second hand	Max. 30N
Minute hand	Max. 50N
Hour hand	Max. 50N
Small hand	Max. 30N
Power reserve hand	Max. 30N

Lift angle 51°

Casing Non-corresponding to "Divers' watches" defined by ISO6425

Time performance

Accuracy	-10~30 seconds/day
Posture difference	Under 40 seconds/ day
Running time	More than 40 hours

※Accuracy of the mechanical watch is different from the daily rate of the quartz watch and the accuracy will change maximum of several ten seconds during rewinding the spring, then the accuracy of the half winding condition will be different from that of full winding condition.

<Time performance measurement condition>


Accuracy

Measure within lapse of 10~60 minutes from full winding with ① posture.

Posture difference

Measure accuracy in 4 different postures shown on the right picture within lapse of 10 ~ 60 minutes from full winding.

※Direction of 4 postures ①Date Dial side Up ②6 o'clock side up ③9 o'clock side up ④3 o'clock side up




Running time

Measure the running time from full winding.

※The mainspring becomes fully wound by rotating the ratchet wheel 7.5 times (turning the crown 40 times).

Automatic winding structure

Winding direction : Clockwise (seeing from case back side)



Operating method

Winding the mainspring, adjusting the hand, month/day/date is done by the below procedure.

(1) Winding the mainspring

Automatic winding watch can be also manual-winded by turning the crown in "A" position.
Wind 15 ~ 20 times clockwise until second hand starts to move naturally.

(2) Adjusting Day

Adjust the day by rotating the crown counter-clockwise in "B" position.

(3) Adjusting date

Adjust the date by rotating the crown clockwise in "B" position.


(4) Adjusting time

Rotate the crown in "C" position and adjust the standard time.
Then check if it is morning or afternoon and adjust correctly.

(5) Adjusting month

Push the button "D" and adjust the month.

※If the button is not pushed to the end, the month is not changed perfectly.

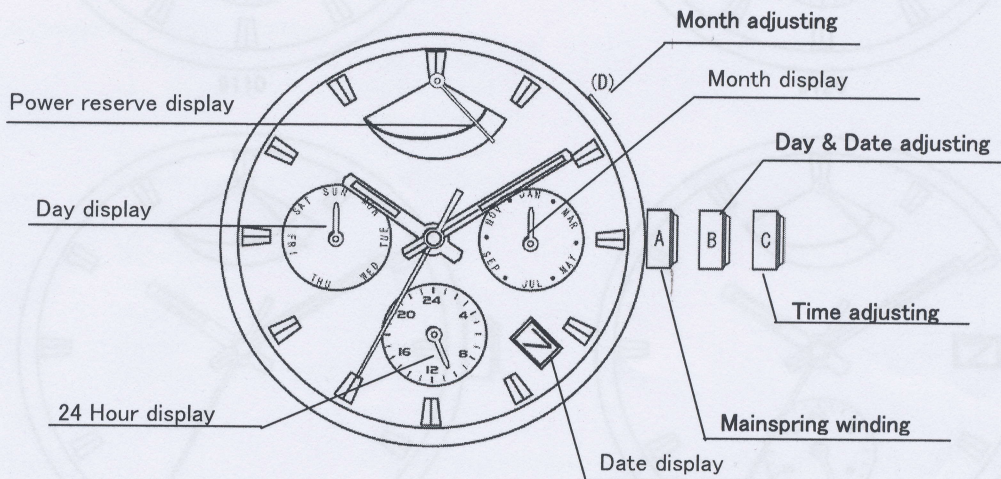

Separated parts

Plastic movement holder	500-002 x 1
Winding stem	065-A05 x 1


Feature

	9100	9110	9120	9130	9132
Hour	○	○	○	○	○
Minute	○	○	○	○	○
Day	○	○	○	○	○
Month	○	○	○	○	○
24 Hour	○	○	○	○	○
Power Reserve	○	○	○	○	○


These specifications might be changed without prior notice.

CITIZEN WATCH CO., LTD.


Variation

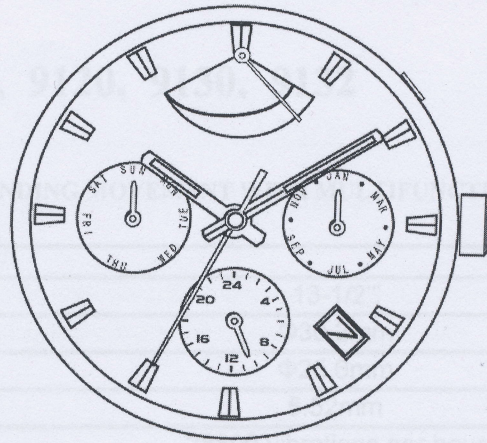


9100

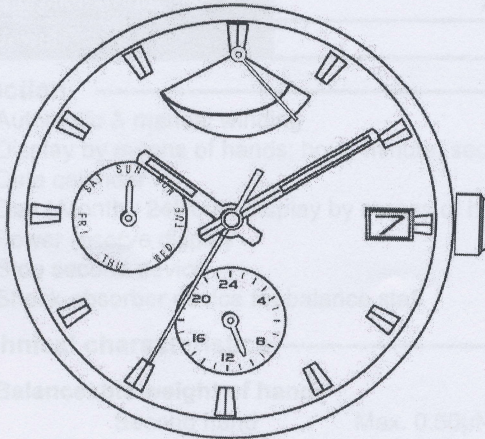


9110

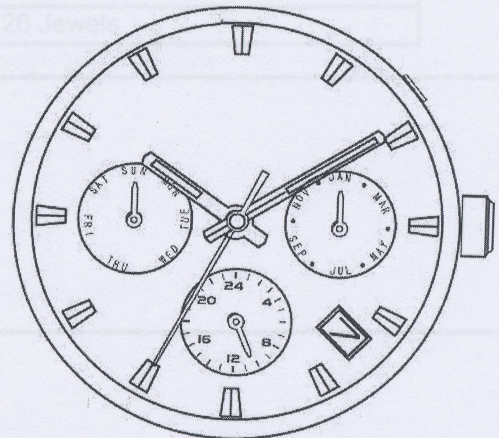

9120

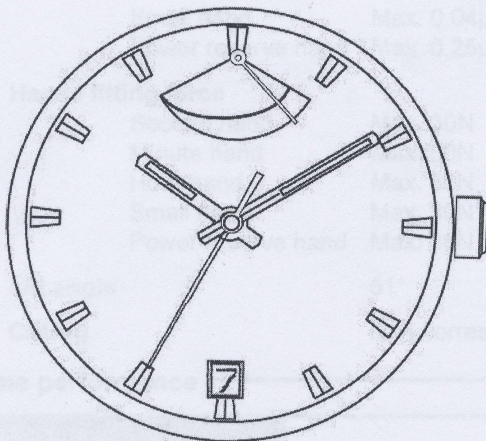

9130

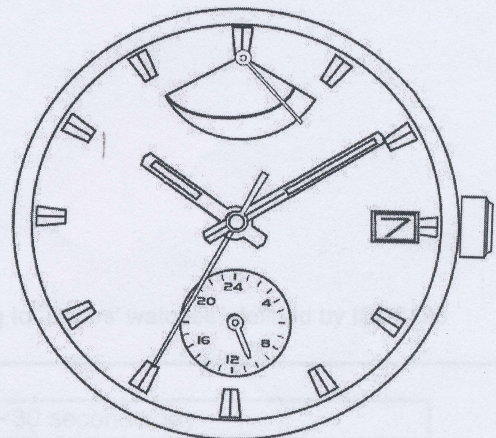

9132

Feature

	9100	9110	9120	9130	9132
Hour	○	○	○	○	○
Minute	○	○	○	○	○
Second	○	○	○	○	○
Date	○	○	○	○	○
Day	○	○	○	—	—
Month	○	—	○	—	—
24 Hour	○	○	○	—	○
Power Reserve	○	○	—	○	○

These specifications might be changed without prior notice.

CITIZEN WATCH CO., LTD.